


RF SHIELDED BOX

EK454545



- Areas where electromagnetic isolation is required between the outdoor and indoor environment;
- Electromagnetic compatibility (EMC/EMI) measurements,
 - Microwave measurements (Antenna parameters, Radar Cross Section etc.)
 - Data centers and meeting rooms where information security (TEMPEST) is at the forefront are used.

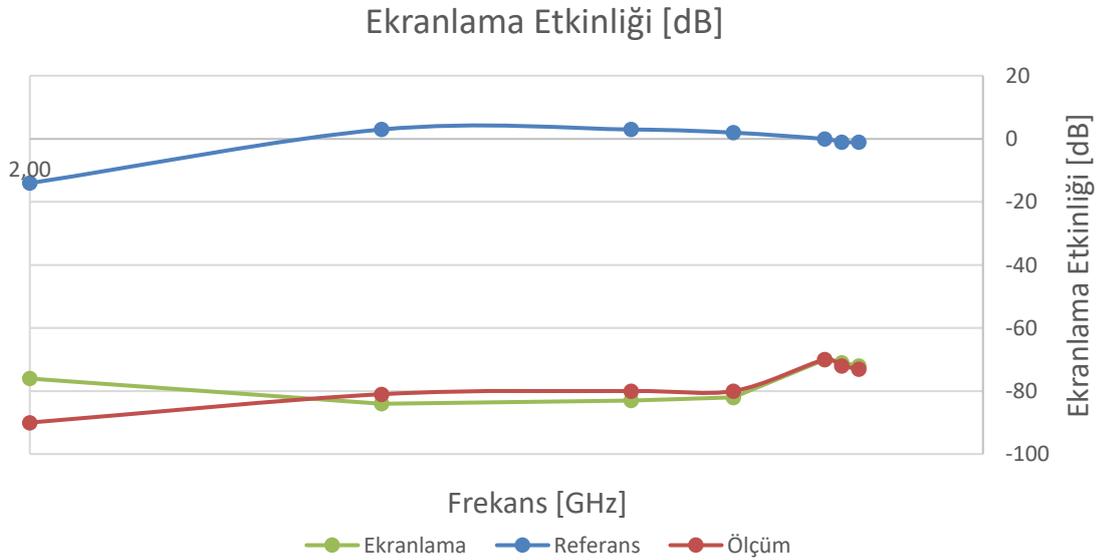

Technical Specification

Frequency Range	800 MHz – 6 GHz
Performance	SE > 70 dB
Connector Type	SMA